




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

PCT/EP200 4 / 0 5 1 5 7 2



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03254738.2

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



Anmeldung Nr:  
Application no.: 03254738.2  
Demande no:

Anmeldetag:  
Date of filing: 29.07.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH  
MAATSCHAPPIJ B.V.  
Carel van Bylandtlaan 30  
2596 HR Den Haag  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

System for sealing a space in a wellbore

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

E21B33/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI



# SYSTEM FOR SEALING A SPACE IN A WELLBORE

The invention relates to a system for sealing a space in a wellbore formed in an earth formation, the earth formation containing formation water susceptible of flowing into the wellbore.

5           In the production of hydrocarbon fluid from a wellbore, it is common practice to install one or more tubular casing sections in the wellbore to stabilize the wellbore and to control inflow of fluid into the wellbore from the surrounding formation. In conventional  
10 applications the casing sections are of stepwise decreasing diameter in downward direction, which is a consequence of the installation procedure whereby each next casing section must pass through the previously installed section.

15           It has been proposed to provide alternative casing schemes which overcome the problem of stepwise decreasing casing diameters. For example in one such alternative casing scheme, each casing section is installed in the wellbore by lowering the casing section through the  
20 previously installed section to the desired depth whereby a short overlap section of the casing section extends into the previously installed section. Next the casing section is radially expanded in the wellbore to allow lowering of a drill string having a drill bit of  
25 relatively large diameter therethrough. After deepening the wellbore using the drill bit of relatively large diameter, a further casing section is lowered through the expanded casing section. Thereafter the cycle of

expanding the casing section, further drilling the wellbore, and lowering a new casing section, is repeated. As a result a wellbore of substantially uniform diameter is achieved.

5           The installed casing sections are in the conventional well construction process fixed and sealed in the wellbore by pumping a layer of cement between the casing and the wellbore wall. This technology could be applied to the Expandable Open Hole Liner, as well. The sealing  
10           function of the cement layer relates to the requirement that migration of formation fluids, such as formation water, through the annular space between the casing and the wellbore wall should be prevented. However it has been experienced that adequate sealing by pumping a layer  
15           of cement in the annular space, is sometimes difficult to achieve. For example if the drilling fluid used to drill the wellbore is not fully replaced by cement in the annular space, or if adequate filling of the annular space with cement is hampered by irregularities in the  
20           wellbore wall, there is a risk that formation fluids migrate in axial direction through the annular space.

WO 03/008756 discloses an alternative system for sealing an annular space in a wellbore, wherein a swelleable annular seal is arranged in the annular space.  
25           The seal is made of a rubber material susceptible of swelling upon contact with oil or water, depending of the type of application. In use the seal swells when formation fluid enters the wellbore thereby sealing the annular space and preventing axial migration of formation  
30           fluid through the wellbore.

Examples of materials which swell when in contact with water are 1) Poly-Electrolytes such as Super Absorbing Polymers (SAP) such as Sodium Polyacrylate and

Acrylic Acids, 2) hydrophilic clays such as Sodium Bentonite particles (e.g. Wyoming Bentonite), or 3) natural water swelling material such as wood, cork or cellulose fillers. Hydrophilic elastomers are used in civil engineering applications, for example as tunnelling gaskets.

Although adequate swelling results have been obtained with the above materials when in contact with fresh (non-saline) water it has been experienced that seals made of these materials swell insufficiently when in contact with saline formation water. For example, Sodium Polyacrylate particles and Bentonite particles immersed in water have a sharply declining swelling ratio when the water changes from fresh water to saline water, especially if divalent cations such as  $\text{Ca}^{2+}$  and  $\text{Mg}^{2+}$  are present which is usually the case for common oilfield formation aquifers. The declining swelling ratio of SAP's in saline water, especially in bi-valent cation containing solutions, is reviewed in "Modern superabsorbent polymer technology", Buchholz, F.L. and Graham, A.T., Wiley New York 1998, page 57 and Fig. 2.16, where the dramatic reduction in swelling capacity of a crosslinked sodium polyacrylate in 0.9 wt. % NaCl solutions, is indicated for increasing  $\text{CaCl}_2$  concentrations. Here, swelling ratio is defined as the ratio of the volume of a body after swelling thereof over the volume of the body before swelling thereof. Furthermore, hydrophilic Polyurethanes (such as Sanyo's Aquaprene C-520® Kuriyama's Aquaquell 8V®, Denbi's Hydrotite®) which do swell in saline solutions are considered unsuitable for most well applications in view of their limited long term resistance to higher temperatures.

It is an object of the invention to provide an improved system for sealing a space in a wellbore formed in an earth formation, which overcomes the drawbacks of the prior art.

5 In accordance with the invention there is provided a system for sealing a space in a wellbore formed in an earth formation, the earth formation containing saline formation water susceptible of flowing into the wellbore, the system comprising a swelleable body including a  
10 matrix material provided with a compound soluble in said saline formation water so as to induce swelling of said body upon permeation of saline formation water into the body by osmotic drive, said body being arranged in the wellbore in a manner so as to seal said space upon  
15 swelling of the swelleable body.

In this manner it is achieved that, by virtue of the presence of said compound soluble in saline formation water, swelling of the matrix material and hence sealing of said space occurs due to osmosis even for highly  
20 saline formation being in contact with the swelleable body.

To prevent or reduce leaching of said compound out of the body of swelleable material, it is preferred that said body includes a matrix material substantially  
25 impermeable to said compound or to ions formed of said compound.

Preferably the matrix material includes a polymer matrix material, for example a thermoset elastomer matrix material or a thermoplastic elastomer matrix material.

30 Suitable thermoset elastomer materials capable of withstanding the high wellbore temperatures for a prolonged period of time are:

1) rubber materials which, apart from swelling in water, also swell in crude oil present in petroleum wells, such as Ethylene Propylene Rubber (EPM and EPDM), Ethylene-Propylene-diene Terpolymer rubber (EPT), butyl rubber (IIR), brominated butyl rubber (BIIR), chlorinated butyl rubber (CIIR), chlorinated polyethylene (CM/CPE), neoprene rubber (CR), styrene butadiene copolymer rubber (SBR), sulphonated polyethylene (CSM), ethylene acrylate rubber (EAM/AEM), epichlorohydrin ethylene oxide copolymer (CO, ECO), Silicone Rubbers (VMQ) and Fluorsilicone Rubber (FVMQ);

2) rubber materials which do not swell in crude oil, such as Butadiene acrylonitrile copolymer (Nitrile Rubber, NBR), Hydrogenated NBR (HNBR, HNS) such as ZETPOL®, TORNAC®, TERBAN®, NBR with reactive groups (X-NBR), Fluoro Rubbers (FKM), such as VITON®, FLUOREL®, Perfluoro Rubbers (FFKM) such as KALREZ®, CHEMRAZ® and Tetrafluorethylene/propylene (TFE/P), such as AFLAS®, which would not swell when exposed to oil field crudes. Most of these elastomers can be crosslinked by more than one crosslinking agent (e.g. either "Sulphur cross-linked of Peroxide cross-linked).

Apart from the thermoset (non swelling and oil swelling) elastomer matrix materials quoted above, also blends of elastomers can be applied ('elastomeric alloys'). Although an almost inexhaustible combination of thermoplastic and thermoset elastomers are feasible, the most preferable are the EPDM / Polypropylene blends such as SARLINK®, Levaflex®, Santoprene®, NBR- Polypropylene blends such as GEOLAST®, NBR / Polyvinylchloride blends and NR / Polypropylene blends. All of these have a tendency to swell in Petroleum crudes, especially at the targeted downhole well temperatures.

Preferably said compound is incorporated in a plurality of particles homogeneously distributed through the matrix material.

Suitable particles are fine particles of salt, preferably dissociating salt, which can be uniformly compounded into the base rubber. For example extremely fine salt particles which are water soluble are applied, the salt being selected from the group of: acetates; M-(CH<sub>3</sub>COO), bicarbonates; M-(HCO<sub>3</sub>), carbonates; M-(CO<sub>3</sub>), formates M-(HCO<sub>2</sub>), halides; Mx-Hy (H = Cl, Br or I), hydrosulphides; M-(HS), hydroxides; M-(OH), imides; M-(NH), nitrates; M-(NO<sub>3</sub>), nitrides; M-N, nitrites; M-(NO<sub>2</sub>), phosphates; M-(PO<sub>4</sub>), sulphides; M-S and sulphates; M-(SO<sub>4</sub>), where M can be any metal of the periodic table. Other salts are can be applied where the cation is a non-metal like NH<sub>4</sub>Cl. However the preferred salts are NaCl and CaCl<sub>2</sub>.

To limit leaching out of the salt from the elastomer, suitably the swelleable body includes any hydrophilic polymer containing polar groups of either oxygen or nitrogen in the backbone or side groups of the polymer. These side groups can be partially or fully neutralised. Polymers of such type are, for example, hydrophilic polymer types such as alcohols, acrylates, methacrylates, acetates, aldehydes, ketones, sulfonates, anhydrides, maleic anhydrides, nitriles, acrylonitriles, amines, amides, oxides (polyethylene oxide), cellulose types including all derivatives of these types, all copolymers including one of the above all grafted variants. Suitably a ternary system is applied which includes an elastomer, a polar SAP and a salt, whereby the polar SAP is grafted onto the backbone of the elastomer. Such system has the advantage that the polar SAP particles



tend to retain the salt particles in the elastomer matrix thereby reducing leaching of the salt from the elastomer. The polar salt is attracted by electrostatic forces to the polar SAP molecules which are grafted ('glued') to the backbone of the rubber.

Generally the swelleable body should be capable of swelling in water of salinity as high as 140 g / Sodium Chloride, and containing considerable concentrations of bivalent ions, such as at least 40 g / l Calcium Chloride and 8 g/l Magnesium Chloride, and at temperatures of at least 40 deg. C but preferably 100 - 150 deg. C which is typical for the static bottom hole temperatures of petroleum wells. The transition from non-swollen to fully swollen state preferably takes place within a timeframe of 2-3 weeks, and the swollen state should be maintained for a period of at least one year.

The invention will be described further in more detail and by way of example, with reference to the accompanying drawing in which:

Fig. 1 schematically shows the swelling behaviour of a material not according to the invention when immersed in water, for various water salinities;

Fig. 2a schematically shows the swelling behaviour of various rubber compositions when immersed in saline water, over a relatively long period of time;

Fig. 2b schematically shows the swelling behaviour of the rubber compositions of Fig. 2a over a relatively short period of time;

Fig. 3 schematically shows the swelling behaviour of a rubber composition when immersed in saline water, for various concentrations of salt contained in the rubber composition;

Fig. 4 schematically shows an embodiment of the system of the invention whereby an annular seal is arranged around a casing extending into a wellbore formed into an earth formation; and

5 Fig. 5 schematically shows a side view of the casing and the annular seal of Fig. 4.

In the Figures like reference numerals relate to like components.

Referring to Fig. 1 there is shown a diagram giving  
10 the swelling ratio of Sodium Polyacrylate immersed in water as a function of NaCl salinity, and for different cross-linking densities (X), whereby

Q = swelling ratio

C = NaCl concentration of the water (wt %)

15 line a: X = 0.025 wt% Sodium Polyacrylate

line b: X = 0.04 wt% Sodium Polyacrylate

line c: X = 0.06 wt% Sodium Polyacrylate

line d: X = 0.08 wt% Sodium Polyacrylate

line e: X = 0.10 wt% Sodium Polyacrylate

20 From the diagram it is clear that water swelleable elastomers prepared by addition of Super Absorbent Polymer (SAP) particles to the rubber matrix material are unsuitable for saline wellbore conditions. Formation  
25 aquifers can be extremely saline (saturated at downhole temperatures), typically 4-6 times the salinity of common sea water. Especially the presence of di-valent cations such as  $\text{Ca}^{2+}$  and  $\text{Mg}^{2+}$  which are commonly present in oilfield aquifers, causes dramatic reduction of the  
30 swelling capability. Such SAP particles can be classified into starch systems, cellulose systems and synthetic resin systems. The SAP's have hydrophilic characteristics by virtue of the presence of alcohols, carboxylic acids, amides or sulphuric acids. Due to cross-linking, the

particles have a three-dimensional network so that the material is capable of swelling to at least 100 times its original volume. Other potentially swelling polymers such as polyurethanes, polyesters, polyethers are considered unsuitable due to their intrinsic instability as a result of hydrolysis.

In Figs. 2a, 2b is shown the swelling ratio (S) of three compositions marketed by RUMA®, Hoogeveen, The Netherlands, as a function of time. The compositions are available under the names:

900-70-1236, indicated by line a'

900-70-1354, indicated by line b'

900-70-1211, indicated by line c'

These compositions have as a base compound EPDM rubber matrix material available from Bayer®, Leverkusen, Germany under the trade name Buna EP® EPT-5459/6950.

Furthermore, these compositions include conventional reinforcing agents, fillers, vulcanising agents, and stabilisers.

Additionally:  
composition 900 70-1236 includes NaCl particles available from AKZO, The Netherlands under the trade name MICROZO® moulded into the rubber matrix material to a concentration of 35% wt of the rubber matrix material;

composition 900-70-1354 includes a SAP (and no salt);  
composition 900-70-1211 includes salt and a SAP.

From the Figures it is clear that  
composition 900 70-1236 shows an excellent swelling ratio of more than 200 volume % in highly saline petroleum aquifer brines containing appreciable quantities of Bi-valent ions,  $\text{Ca}^{2+}$ ,  $\text{Mg}^{2+}$ . Composition 900-70-1354 has a poor swelling performance (about 18 volume %), and the hybrid composition 900-70-1211 has a swelling performance

inbetween the performance of compositions 900-70-1354 and 900-70-1236.

Referring to Fig. 3 there is shown a diagram indicating the swelling ratio (S) of compositions based on composition 900-70-1236, but now for different concentrations of NaCl particles in the rubber matrix material Buna EP® EPT-5459/6950. The salt particle concentrations are:

34.8 wt %, indicated by line a"

26.3 wt %, indicated by line b"

41.6 wt %, indicated by line c"

15.1 wt %, indicated by line d"

All other additives in these compositions were kept constant.

It appeared that the optimum swelling ratio was achieved for NaCl particle concentrations in the range of 32-37 wt % based on the weight of the matrix material.

In Figs. 4 and 5 is shown a wellbore 1 formed in an earth formation 2 which includes an earth formation layer 4 containing saline formation water. A wellbore casing 6 is arranged in the wellbore 1 whereby an annular space 7 is formed between the casing 6 and the wellbore wall 8. A wellhead 10 is arranged on top of the wellbore, at the earth surface. An annular seal in the form of a number of rings 12 (only one ring 12 is shown) is arranged in the annular space 7, in a portion of the wellbore opposite the earth formation layer 4.

The rings 12 are composed of one or more of the thermoset or thermoplastic elastomer materials susceptible of swelling in water, referred to above. The rings 12 are, for example, formed of strips 14 extending around the casing 6. Each ring 12 typically has a length of between 0.05 - 0.5 m, and a thickness of

between 0.003 - 0.07 m. A bonding agent is applied between the rings and the casing to fix the rings 12 to the outer surface of the casing 6, the bonding agent preferably being effective during vulcanisation of the elastomer material. Furthermore, the rings 12 include a high concentration (at least 20 wt %, preferably between 30 - 35 wt % of the base elastomer) of salt particles so as to induce swelling of the elastomer material upon permeation of saline formation water into the elastomer material by osmosis. In the present example the salt particles are NaCl particles, but any high concentration of a mono-, di- or tri-valent water soluble salt can be used.

In order to protect the rings 12 during installation of the casing 6 in the wellbore, optionally the set of rings 12 is additionally provided with one or more rings ("wear pads") or sleeves which do not swell in water, such as NBR, HNBR, FKM, XNBR, FFKM, TFE/P rubber rings. Such additional rings should have a high abrasion resistance, and are preferably arranged at either side of each swelling elastomer ring 12. Alternatively these rings could be arranged at the ends of the set of rings 12 only.

During normal operation the NaCl particles are moulded into the rubber matrix material prior to vulcanisation thereof, using a suitable moulding apparatus (not shown) such as a) the two roll mill, b) the mixing mill, or c) the Gordon Plasticator. For a complete review of such techniques reference can be made to:

Werner Hofmann, Rubber Technology Handbook, 2<sup>nd</sup> ed. (1996), Hanser/Gardner Publications, Cincinnati,

ISBN 1-56990-145-7 Chapter 5 : Processing of elastomers,  
'Compound Preparation'.

5 The rubber matrix material is then formed into the  
strip 14 which is radially or slightly helically wrapped  
around the casing 6 at surface. In a next step the rubber  
matrix material, and optionally also the material of the  
wear pads, is vulcanised in an oven at temperatures of  
typically 150 - 180 °C to form the rings 12. Thereafter  
10 the casing 6 is lowered into the wellbore 1 until the  
rings 12 are positioned in said portion of the wellbore 1  
opposite the earth formation layer 4. The thickness of  
the rings 12 is selected sufficiently small to allow  
unhampered lowering of the casing 6.

15 Upon flow of saline formation water from formation  
layer 4 into the wellbore 1, the saline formation water  
thereby comes into contact with the water swelling rings  
12. Due to the salt concentration in the salt particles  
(pure salt) being much higher than the salinity of the  
formation water itself, permeation of formation water  
20 into the rubber matrix material will occur as a result of  
osmosis, which leads to swelling of the rings 12 whereby  
the rings 12 become pressed against the wellbore wall and  
thereby completely seal the annular space 7. In this  
manner any further migration of formation water through  
25 the annular space 7 is prevented.

If required the casing 6 is radially expanded in the  
wellbore, preferably before swelling of the rings 12  
occurs.

30 All samples referred to in Figs. 2a, 2b and 3 were  
immersed in saline aquifer water ("100 % Oman aquifer  
water") including 139 gram/litre NaCl, 41 gram/litre  
CaCl<sub>2</sub> , 7.5gram/litre MgCl<sub>2</sub>, and having a temperature  
of 95 °C.

Instead of applying the rings (referred to in Figs. 4 and 5) on a casing, the rings can be applied on one or more sections of blank pipe arranged between sections of sandscreen, for example expandable sandscreen. In this manner it is feasible to create separate sandscreen inflow sections which can be selectively shut-off during the lifetime of the well.

Suitably the casing is an expandable casing which is radially expanded in the wellbore before or after swelling of the rings, preferably before swelling of the rings.



C L A I M S

1. A system for sealing a space in a wellbore formed in an earth formation, the earth formation containing saline formation water susceptible of flowing into the wellbore, the system comprising a swelleable body including a  
5 matrix material provided with a compound soluble in said saline formation water so as to induce swelling of said body upon permeation of saline formation water into the body by chemical osmotic drive, said body being arranged in the wellbore in a manner so as to seal said space upon  
10 swelling of the swelleable body.
2. The system of claim 1, wherein said matrix material is substantially impermeable to said compound or to ions formed of said compound.
3. The system of claim of claim 1 or 2, wherein the  
15 matrix material includes a polymer matrix material.
4. The system of claim 3, wherein the polymer matrix material is an elastomer matrix material.
5. The system of claim 4, wherein the elastomer matrix material includes a rubber selected from NBR, HNBR, XNBR,  
20 FKM, FFKM, TFE/P or EPDM base rubber.
6. The system of any one of claims 1-5, wherein said compound is included in a plurality of particles distributed through the matrix material.
7. The system of claim 6, wherein said compound  
25 comprises salt, preferably a dissociating salt.
8. The system of claim 7, wherein the salt is one of the group of acetates; M-(CH<sub>3</sub>COO), bicarbonates; M-(HCO<sub>3</sub>), carbonates; M-(CO<sub>3</sub>), formates M-(HCO<sub>2</sub>), halides; M<sub>x</sub>-H<sub>y</sub> (H = Cl, Br or I), hydrosulphides; M-(HS), hydroxides;



M-(OH), imides; M-(NH), nitrates; M-(NO<sub>3</sub>), nitrides; M-N, nitrites; M-(NO<sub>2</sub>), phosphates; M-(PO<sub>4</sub>), sulphides; M-S and sulphates; M-(SO<sub>4</sub>), where M can be any metal of the periodic table. Other salts can be where the cation is a non-metal like NH<sub>4</sub>Cl.

5

9. The system of claim 7 or 8 wherein said body contains at least 20 wt % salt based on the of weight of the matrix material including salt, and preferably at least 35 wt % salt based on the of weight of the matrix material including salt.

10

10. The system of any one of claims 1-9, wherein said body is arranged to seal an annular space formed between a tubular element extending into the wellbore and a bore surrounding the tubular element,

15

11. The system of claim 10, wherein said tubular element is a wellbore casing and said bore is the wellbore wall.

12. The system of claim 10 or 11, wherein said body is arranged in a portion of the wellbore opposite an earth formation layer containing said saline formation water.

20

13. The system of claim 11, wherein said body forms one or more rings, each ring extending around the tubular element.

14. A method of sealing an annular space in a wellbore formed in an earth formation containing saline formation water susceptible of flowing into the wellbore, the annular space being formed between a tubular element extending into the wellbore and a bore surrounding the tubular element, the method comprising

25

a) providing one or more rings around the tubular element, each ring comprising a swelleable material permeable to water, said ring including a matrix material provided with a compound soluble in saline formation water is so as to induce swelling of the ring upon

30

permeation of saline formation water into the ring by chemical osmotic drive; and

5 b) lowering the tubular element into the wellbore in a manner that said one or more rings is arranged in a portion of the wellbore opposite an earth formation layer containing said saline formation water.

10 15. The method of claim 14, wherein each said ring includes a rubber matrix material in which a plurality of particles of said compound are distributed, and wherein cross-linking of the rubber matrix material is induced to occur after step a).

16. The method of claim 15, wherein said cross-linking of the rubber matrix material is induced to occur prior to step b).

15 17. The method of any one of claims 14-16, wherein said compound comprises salt.

18. The system substantially as described hereinbefore with reference to the accompanying drawing.

20 19. The method substantially as described hereinbefore with reference to the accompanying drawing.



A B S T R A C T

SYSTEM FOR SEALING A SPACE IN A WELLBORE

A system is provided for sealing a space in a wellbore formed in an earth formation, the earth formation containing saline formation water susceptible of flowing into the wellbore. The system comprises a swelleable body permeable to water, said body including a matrix material provided with a compound soluble in said saline formation water so as to induce swelling of said body upon permeation of saline formation water into the body by chemical osmotic drive. Said body is arranged in the wellbore in a manner so as to seal said space upon swelling of the swelleable body.

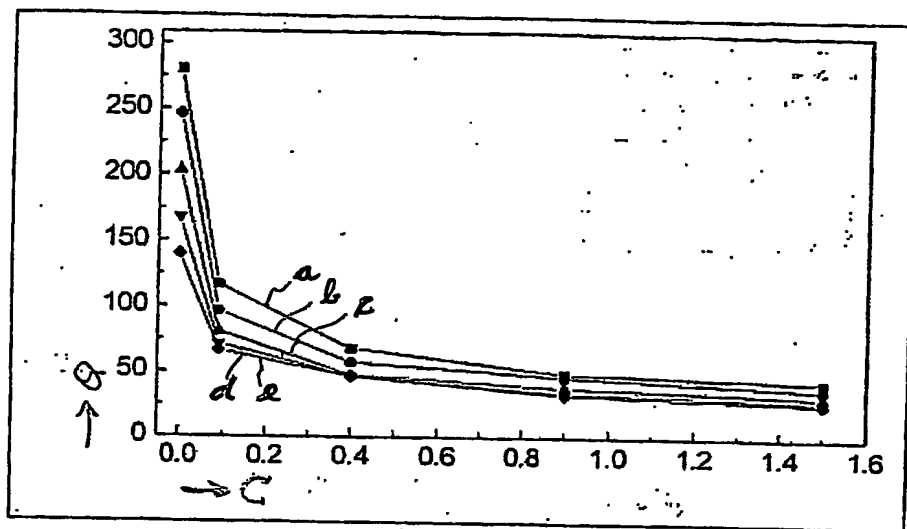


FIG. 1

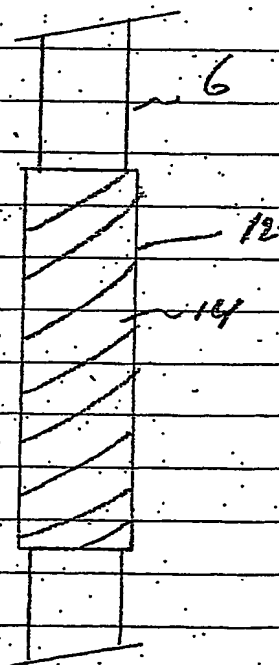


FIG. 5

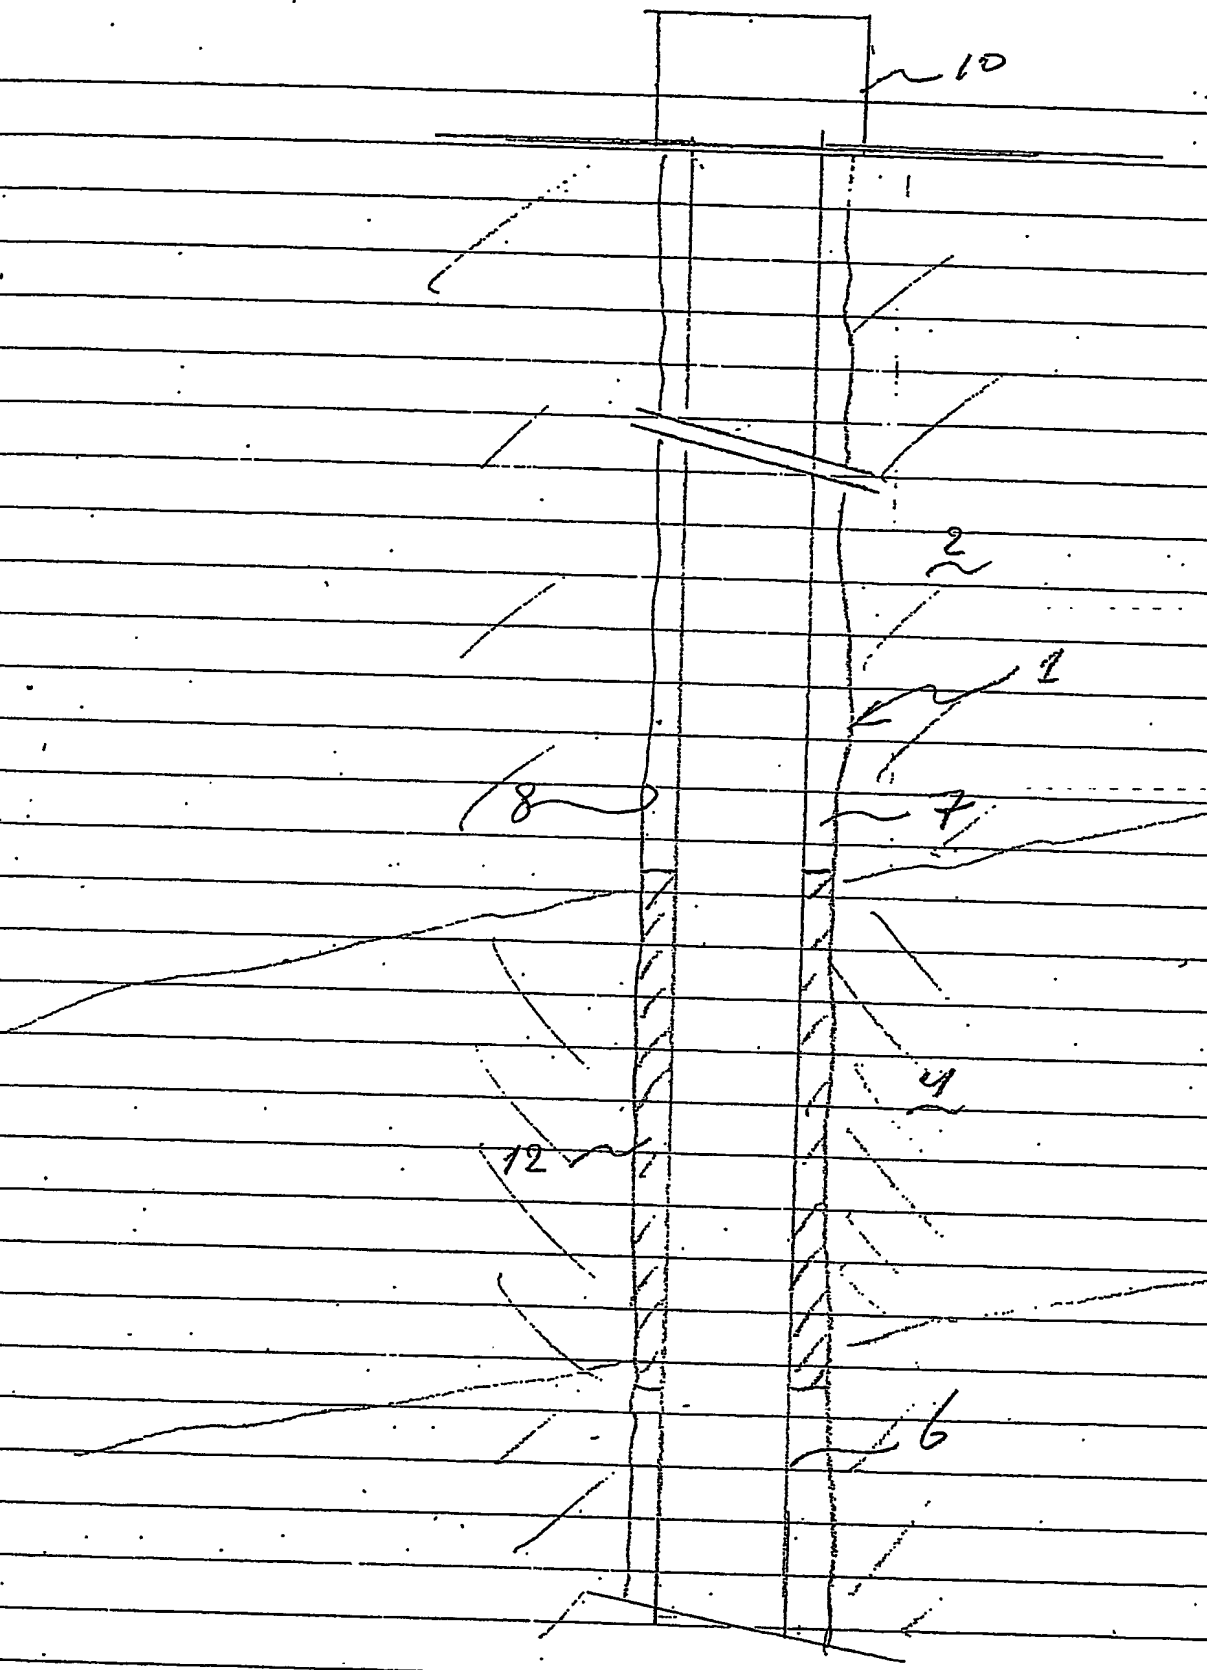


FIG. 4

Fig 2a



Fig. 2b


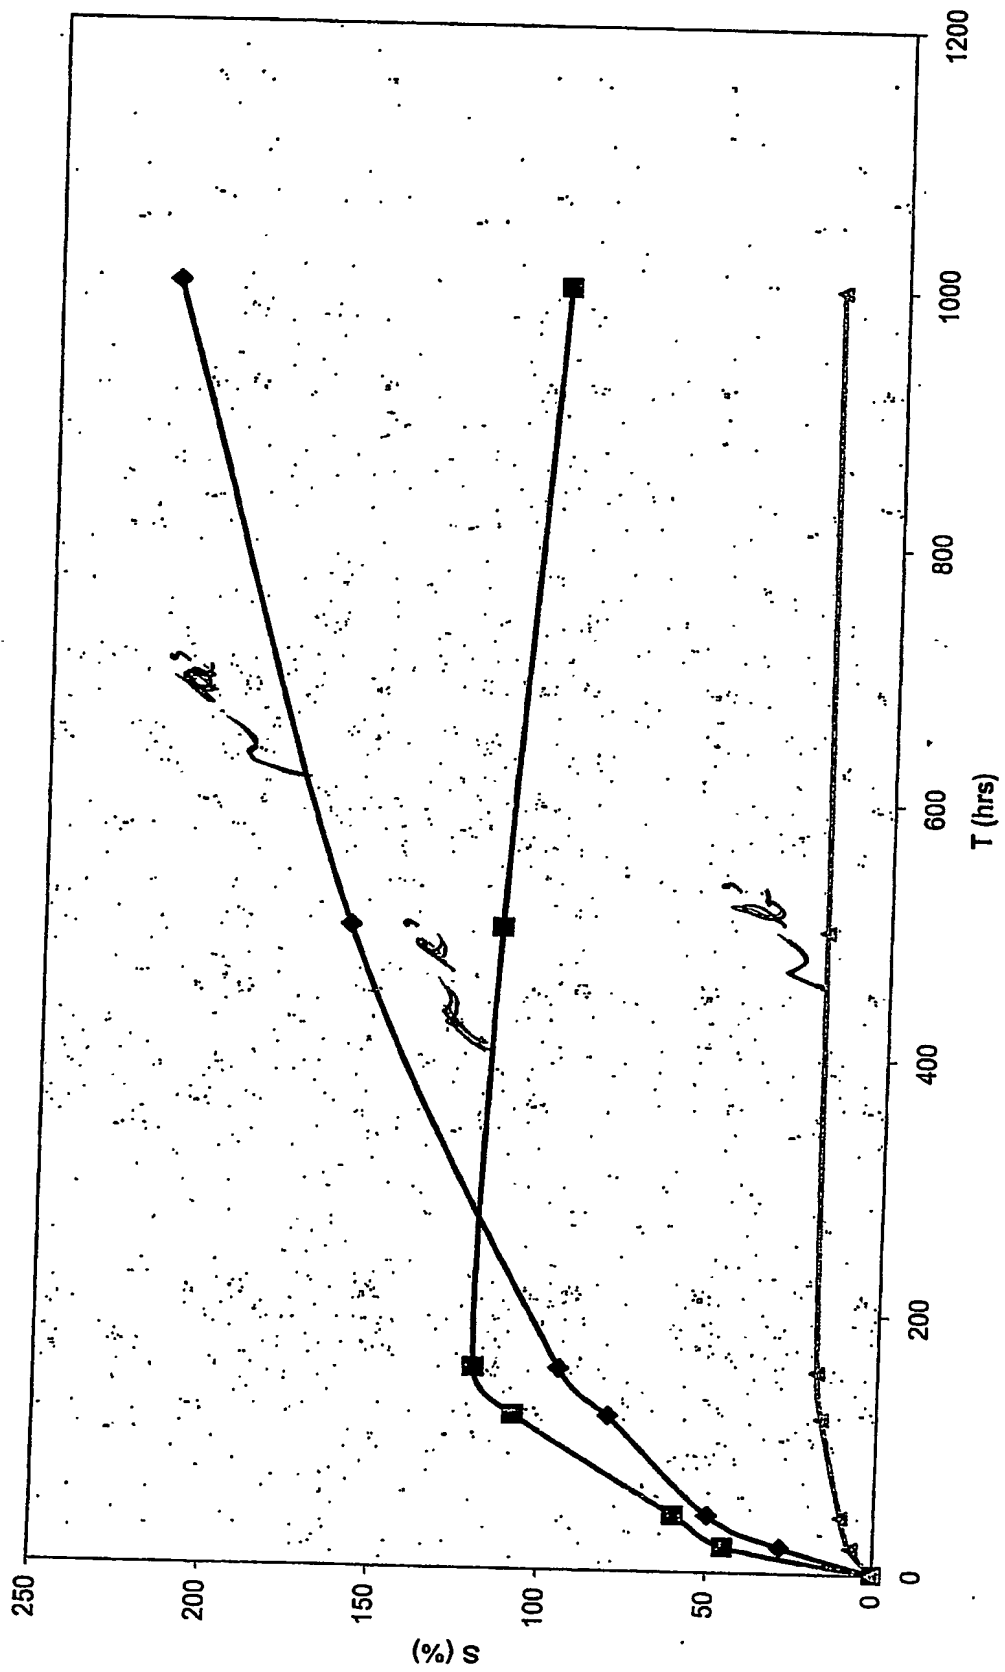


Fig. 3



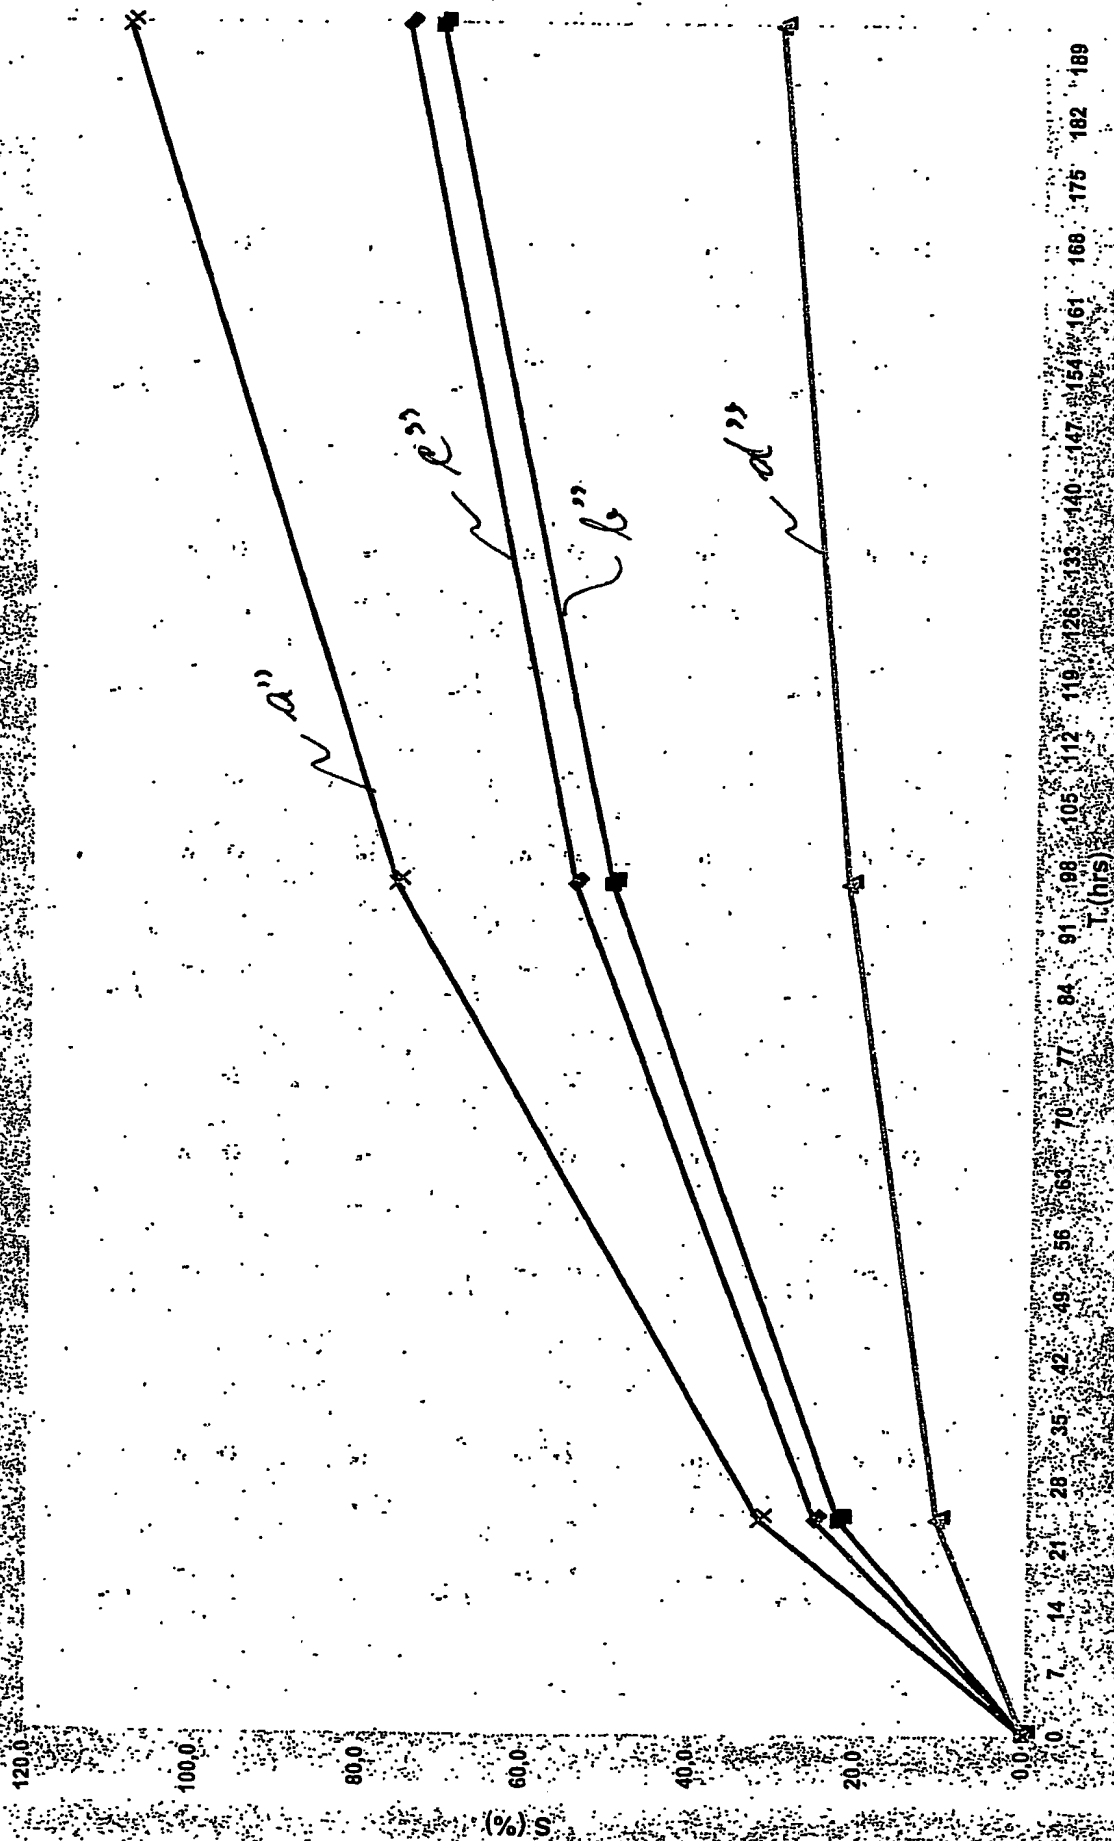

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**